


L6D20, L6D50



L6E3200



H8C (4KLB)




L6G500, L6G750




Product Specification:


Series	X5 Series		X7 Series			
Model	L6D20	L6D50	L6E3200	L6G500	L6G750	H8C
Brand	Synctronix					
Capacity	20kg	50kg	200kg	500kg	750kg	4klb
Material	Aluminium Alloy					
Accuracy Class	III					
Sensitivity	2.0mV/V±10%					3.0mV/V±0.2%
Protection	IP67/68					
Excitation	8~12V (DC)					
Temperature	-10°C ~ +70°C					
Safe Overload	150% F.S.					120% F.S.
Ultimate Overload	300% F.S.					150% F.S.
Cable Length	0.3m		5m	0.3m	0.3m	3m
Cable Color	Black					Blue
Excitation +	Red					
Excitation -	Black					
Signal +	Green					
Signal -	White					
Shield	Yellow					
Input	415±15Ω					350±3.5Ω
Output	350±3Ω					351±2Ω




L6D20, L6D50



L6E3200




L6G500, L6G750




H8C (4KLB)




Product Dimensions:

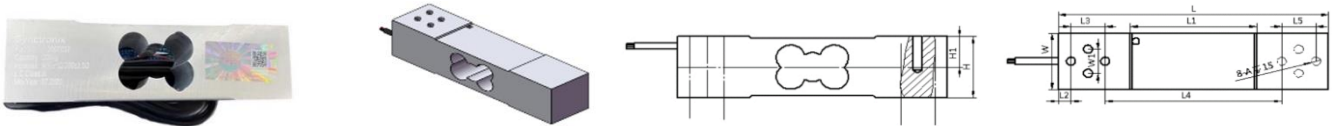


Model	L	L1	L2	L3	L4	L5	W	W1	H	H1	A
L6E3200	150	70	7	19	98	19	35	15	38	36.5	M6

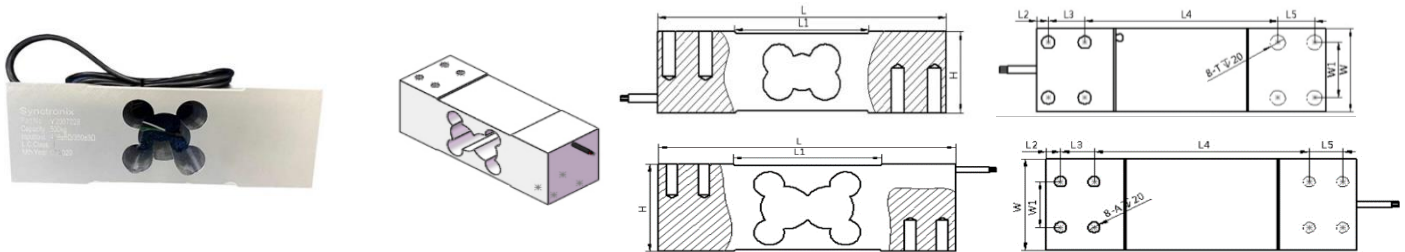

Model	L	L1	L2	L3	L4	L5	W	W1	H	T/A
L6G500	150	85	6	19	100	19	45	30	40	M8
L6G750	176	88	8	19	122	19	60	30	62	M8

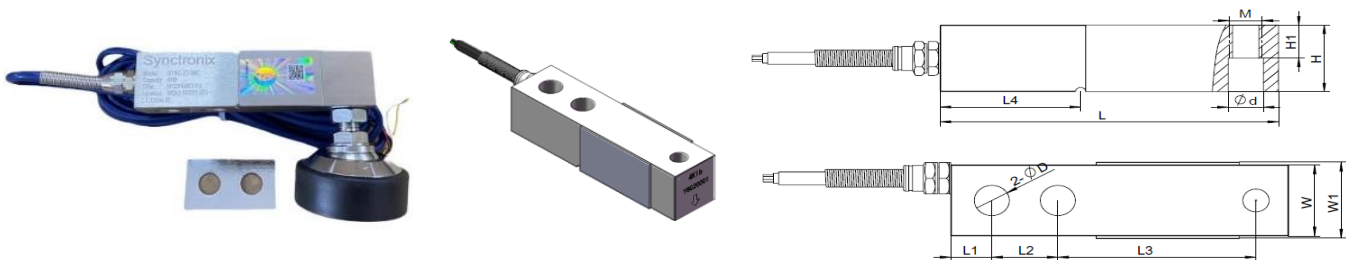

Model	L	L1	L2	L3	L4	H	H1	W	W1	D	d	M
H8C	130	15.8	25.4	76.2	54.2	31.8	15.8	31.8	34	13.5	13.5	1/2-2UNF

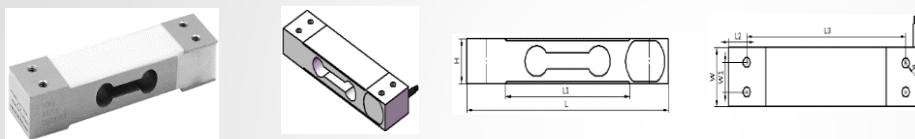

Model	L	L1	L2	L3	W	W1	H	A
L6D20, L6D50	130	80	12	106	30	15	22	M6

