



SIRIM Pattern Approval No. Kelulusan : ATS-0053-20 / ATS-0054-20

Model : SYNC-X7-X722





Product Features:

- Easy to handle plastic enclosure design
- Rugged ABS material housing
- Transparent dust-cover included
- Big LCD with backlit
- Accumulation
- Auto power off
- Low battery indication
- Support one analogue load cell platform with up to four 350Ω load cells
- Powered by either AC 100V ~240V/50Hz~60Hz and DC 9 V/1A or internal 6V4AH battery pack
- One standard serial port (COM1) as RS232 and DB9 serial port
- Front panel key access to basic weighing functions, Zero, Tare, Clear, configurable function, count and print
- Animal weighing: Peak hold. Data hold, Auto hold

Product Specification:

Model	SYNC-X7-X722
Brand	Synctronix
Power Supply	100-240V / 50-60Hz / Rechargeable Battery 6V4.5AH
Stimulating Voltage	+5 VDC
A/D Converting Speed	80 or 100 SPS (Default: 10SPS)
Load Signal Range	-10-30m VDC
Load Capacity	Can connect up to 4 pcs 350Ω load cell
Resolution	6000e
Display Mode	Big LCD with backlit (40mm)
Units	kg, g, pcs
Working Temperature Range	-10°C ~ +40°C
Storage Temperature Range	-20°C ~ +60°C
Dimension	22.5cm x 8.25cm x 15cm
Weight	2.10kg
Material	ABS Material Housing
Class	III
Industry	Industrial & Commercial
SIRIM Pattern Approval	Yes

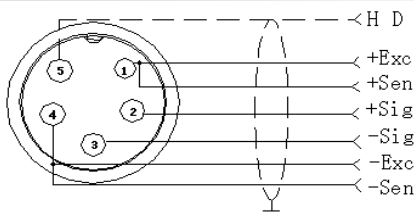

PIN2-----TXD 1
PIN3-----RXD1
PIN5 -----GND

PIN6-----TXD2
PIN7----- RXD1
PIN9-----GND

